

PHE840M

- EMI suppressor, class X2, metallized polypropylene
- 0.01 – 10.0 μF , 275/280 VAC, +105°C
- Small dimensions including low profile capacitors

TYPICAL APPLICATIONS


For worldwide use as electromagnetic interference suppressor in all X2 and across-the-line applications.

CONSTRUCTION

Metallized polypropylene film encapsulated with selfextinguishing epoxy resin in a box of material recognized to UL 94 V-0.

TECHNICAL DATA

Rated voltage	275 VAC 50/60 Hz (ENEC) 280 VAC 50/60 Hz (UL, CSA)																
Capacitance range	0.01 – 10.0 μF																
Capacitance tolerance	$\pm 20\%$ standard, $\pm 10\%$ option, $\pm 5\%$ on request																
Temperature range	-55 to +105°C																
Climatic category	55/105/56/B																
Approvals	ENEC, UL, CSA																
Dissipation factor	Maximum values at +23°C																
	<table border="1"> <thead> <tr> <th></th> <th>$C \leq 0.1 \mu\text{F}$</th> <th>$0.1 \mu\text{F} < C \leq 1 \mu\text{F}$</th> <th>$C > 1 \mu\text{F}$</th> </tr> </thead> <tbody> <tr> <td>1 kHz</td> <td>0.1%</td> <td>0.1%</td> <td>0.1%</td> </tr> <tr> <td>10 kHz</td> <td>0.2%</td> <td>0.4%</td> <td>0.8%</td> </tr> <tr> <td>100 kHz</td> <td>0.6%</td> <td>-</td> <td>-</td> </tr> </tbody> </table>		$C \leq 0.1 \mu\text{F}$	$0.1 \mu\text{F} < C \leq 1 \mu\text{F}$	$C > 1 \mu\text{F}$	1 kHz	0.1%	0.1%	0.1%	10 kHz	0.2%	0.4%	0.8%	100 kHz	0.6%	-	-
	$C \leq 0.1 \mu\text{F}$	$0.1 \mu\text{F} < C \leq 1 \mu\text{F}$	$C > 1 \mu\text{F}$														
1 kHz	0.1%	0.1%	0.1%														
10 kHz	0.2%	0.4%	0.8%														
100 kHz	0.6%	-	-														
Test voltage between terminals	The 100% screening factory test is carried out at 2200 VDC. The voltage level is selected to meet the requirements in applicable equipment standards. All electrical characteristics are checked after the test.																
Insulation resistance	$C \leq 0.33 \mu\text{F}$: $\geq 30\,000 \text{ M}\Omega$ $C > 0.33 \mu\text{F}$: $\geq 10\,000 \text{ s}$																
In DC applications	Maximum voltage 760 VDC																

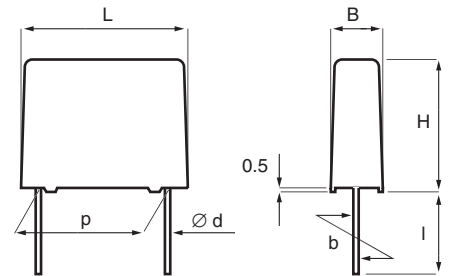

p	d	std l	max l	b
7.5 ± 0.4	0.6	17	20	± 0.4
10.0 ± 0.4	0.6	17	30	± 0.4
15.0 ± 0.4	0.8	17	30	± 0.4
22.5 ± 0.4	0.8	6	30	± 0.4
27.5 ± 0.4	0.8	6	30	± 0.4
37.5 ± 0.5	1.0	6	30	± 0.7

Tolerance in lead length
< 30 mm $+0$
 -1 mm

30 mm $+5$
 -0 mm

ENVIRONMENTAL TEST DATA

Endurance	IEC 60384-14	1.25 x U_R VAC 50 Hz, once every hour increased to 1000 VAC for 0.1 s, 1000 h at upper rated temperature	
Vibration	IEC 60068-2-6 Test Fc	3 directions at 2 hours each, 10-55 Hz at 0.75 mm or 98 m/s ²	No visible damage No open or short circuit
Bump	IEC 60068-2-29 Test Eb	1000 bumps at 390 m/s ²	No visible damage No open or short circuit
Change of temperature	IEC 60068-2-14 Test Na	Upper and lower rated temperature 5 cycles	No visible damage
Active flammability	EN 132400		
Passive flammability	IEC 60384-14 (1993) EN 132400 UL1414	Enclosure material of UL94V-0 flammability class	
Humidity	IEC 60068-2-3 Test Ca	+40°C and 90 – 95% R.H.	56 days

ARTICLE TABLE

Capacitance µF	Box code	Max dimensions in mm			f _o MHz	Max dU/dt V/µs	Article code	Capacitance µF	Box code	Max dimensions in mm			f _o MHz	Max dU/dt V/µs	Article code
		B	H	L						B	H	L			
LEAD SPACING 7.5 MM							LEAD SPACING 22.5 MM								
0.010	K01	4.0	8.0	10.0	14	100	PHE840MK5100MK01R17	0.22	D13	6.5	14.5	26.0	2.1	100	PHE840MD6220MD13R06L2
0.012	K01	4.0	8.0	10.0	13	100	PHE840MK5120MK01R17	0.27	D17	7.0	16.5	26.0	1.9	100	PHE840MD6270MD17R06L2
0.015	K01	4.0	8.0	10.0	12	100	PHE840MK5150MK01R17	0.33	D17	7.0	16.5	26.0	1.8	100	PHE840MD6330MD17R06L2
0.018	K03	5.0	11.0	10.0	11	100	PHE840MK5180MK03R17	0.39	D14	8.0	16.0	26.0	1.7	100	PHE840MD6390MD14R06L2
0.022	K03	5.0	11.0	10.0	10	100	PHE840MK5220MK03R17	0.47	D14	8.0	16.0	26.0	1.6	100	PHE840MY6470MD14R06L2*
0.027	K03	5.0	11.0	10.0	9.5	100	PHE840MK5270MK03R17	0.47	D15	9.0	18.5	26.0	1.5	100	PHE840MD6470MD15R06L2
0.033	K03	5.0	11.0	10.0	8.8	100	PHE840MK5330MK03R17	0.56	D15	9.0	18.5	26.0	1.4	100	PHE840MD6560MD15R06L2
0.039	K03	5.0	11.0	10.0	8.3	100	PHE840MK5390MK03R17	0.68	D15	9.0	18.5	26.0	1.3	100	PHE840MY6680MD15R06L2*
0.047	K04	6.0	12.0	10.0	7.5	100	PHE840MK5470MK04R17	0.68	D18	10.5	19.0	26.0	1.2	100	PHE840MD6680MD18R06L2
LEAD SPACING 10 MM							LEAD SPACING 27.5 MM								
0.022	A01	4.0	9.0	13.0	8.5	100	PHE840MA5220MA01R17	0.82	D16	11.0	21.5	26.0	1.1	100	PHE840MD6820MD16R06L2
0.027	A01	4.0	9.0	13.0	8.0	100	PHE840MA5270MA01R17	1.0	D16	11.0	21.5	26.0	1.1	100	PHE840MY7100MD16R06L2*
0.033	A01	4.0	9.0	13.0	7.6	100	PHE840MA5330MA01R17	1.0	D20	13.5	23.0	26.0	1.0	100	PHE840MD7100MD20R06L2
0.039	A02	4.5	10.5	13.0	6.7	100	PHE840MA5390MA02R17	1.2	D19	15.5	24.5	26.0	0.90	100	PHE840MD7120MD19R06L2
0.047	A02	4.5	10.5	13.0	5.9	100	PHE840MA5470MA02R17	1.5	D19	15.5	24.5	26.0	0.85	100	PHE840MD7150MD19R06L2
0.056	A03	5.0	11.0	13.0	5.5	100	PHE840MA5560MA03R17	LEAD SPACING 37.5 MM							
0.068	A03	5.0	11.0	13.0	4.9	100	PHE840MA5680MA03R17	0.82	F11	10.5	20.5	31.5	1.0	100	PHE840MF6820MF11R06L2
0.082	A04	6.0	12.0	13.0	4.4	100	PHE840MA5820MA04R17	1.0	F11	10.5	20.5	31.5	1.0	100	PHE840MZ7100MF11R06L2 *
0.10	A05	9.5	7.5	13.0	4.0	100	PHE840MP6100MA05R17	1.0	F12	11.5	22.5	31.5	0.95	100	PHE840MF7100MF12R06L2
0.10	A04	6.0	12.0	13.0	4.0	100	PHE840MA6100MA04R17	1.2	F03	13.5	23.0	31.5	0.82	100	PHE840MF7120MF03R06L2
LEAD SPACING 15 MM							1.5	F13	14.5	24.5	31.5	0.73	100	PHE840MF7150MF13R06L2	
0.047	B04	5.5	10.5	18.0	5.0	100	PHE840MB5470MB04R17	1.8	F14	17.5	28.0	31.5	0.65	100	PHE840MF7180MF14R06L2
0.056	B04	5.5	10.5	18.0	4.6	100	PHE840MB5560MB04R17	2.2	F14	17.5	28.0	31.5	0.64	100	PHE840MZ7220MF14R06L2 *
0.068	B04	5.5	10.5	18.0	4.2	100	PHE840MB5680MB04R17	2.2	F15	19.0	29.0	31.5	0.62	100	PHE840MF7220MF15R06L2
0.082	B05	5.5	12.5	18.0	3.9	100	PHE840MB5820MB05R17	2.7	F15	19.0	29.0	31.5	0.58	100	PHE840MF7270MF15R06L2
0.10	B05	5.5	12.5	18.0	3.7	100	PHE840MB6100MB05R17	3.3	F15	19.0	29.0	31.5	0.54	100	PHE840MZ7330MF15R06L2 *
0.12	B10	6.5	12.5	18.0	3.3	100	PHE840MB6120MB10R17	3.3	F16	21.0	30.0	31.5	0.50	100	PHE840MF7330MF16R06L2
0.15	B10	6.5	12.5	18.0	2.8	100	PHE840MB6150MB10R17	3.3	F18	31.0	18.5	31.5	0.50	100	PHE840Mt7330MF18R06L2
0.18	B06	7.5	14.5	18.0	2.7	100	PHE840MB6180MB06R17	LEAD SPACING 37.5 MM							
0.22	B06	7.5	14.5	18.0	2.6	100	PHE840MX6220MB06R17*	1.8	R05	13.0	24.0	41.0	0.60	100	phe840mr7180mR05R06L2
0.22	B17	13.0	12.5	18.0	2.5	100	PHE840MQ6220MB17R17	2.2	R05	13.0	24.0	41.0	0.58	100	PHE840MR7220MR05R06L2
0.22	B12	8.0	15.0	18.0	2.5	100	PHE840MB6220MB12R17	2.7	R04	15.0	26.0	41.0	0.53	100	PHE840MR7270MR04R06L2
0.27	B11	8.5	16.0	18.0	2.3	100	PHE840MB6270MB11R17	3.3	R04	15.0	26.0	41.0	0.49	100	PHE840MR7330MR04R06L2
0.33	B11	8.5	16.0	18.0	2.2	100	PHE840MX6330MB11R17*	3.9	R02	16.5	32.0	41.0	0.46	100	PHE840MR7390MR02R06L2
0.33	B17	13.0	12.5	18.0	2.2	100	PHE840MH6330MB17R17*	4.7	R03	19.0	36.0	41.0	0.44	100	PHE840MR7470MR03R06L2
0.33	B14	9.5	17.5	18.0	2.0	100	PHE840MB6330MB14R17	5.6	R06	21.0	38.0	41.0	0.41	100	PHE840MR7560MR06R06L2
0.39	B16	11.0	19.0	18.0	1.9	100	PHE840MB6390MB16R17	6.8	R06	21.0	38.0	41.0	0.39	100	PHE840MR7680MR06R06L2
0.47	B16	11.0	19.0	18.0	1.8	100	PHE840MB6470MB16R17	8.2	R08	28.0	43.0	41.0	0.30	100	PHE840MR7820MR08R06L2
								10.0	R08	28.0	43.0	41.0	0.26	100	PHE840MR8100MR08R06L2

* Only ± 20% tolerance

APPROVALS/REFERENCE DOCUMENTS

Certification Body	Specification	Approval reference
ENEC UL	EN 132400	SE/0140-4A
	UL 1283 (U _R = 280 VAC)	E100117
	UL 1414 (U _R = 250 VAC)	E73869
cUL recognition (CSA)	C 22.2 No. 8 (U _R = 280 VAC)	E100117
	C 22.2 No. 1 (U _R = 280 VAC)	E73869
	C 22.2 No. 1 (U _R = 250 VAC)	

MARKING

- RIFA
- RIFA article code
- Rated capacitance
- Capacitance tolerance code
- Rated voltage
- X2
- Approval marks
- Manufacturing date code
- IEC climatic category
- Passive flammability class

ORDERING INFORMATION

The article code for the standard part is given in the article table. For other options, see page 12.